Cerutti SPA

Luxury
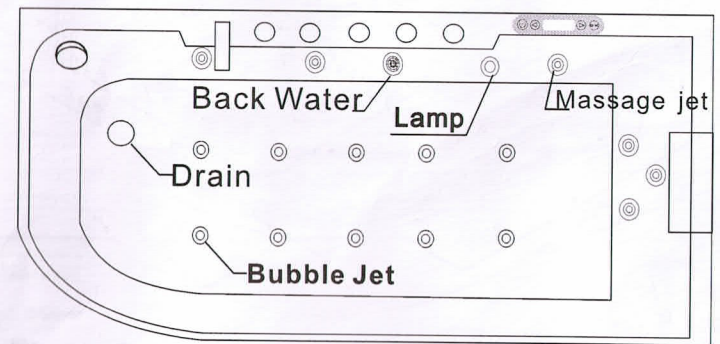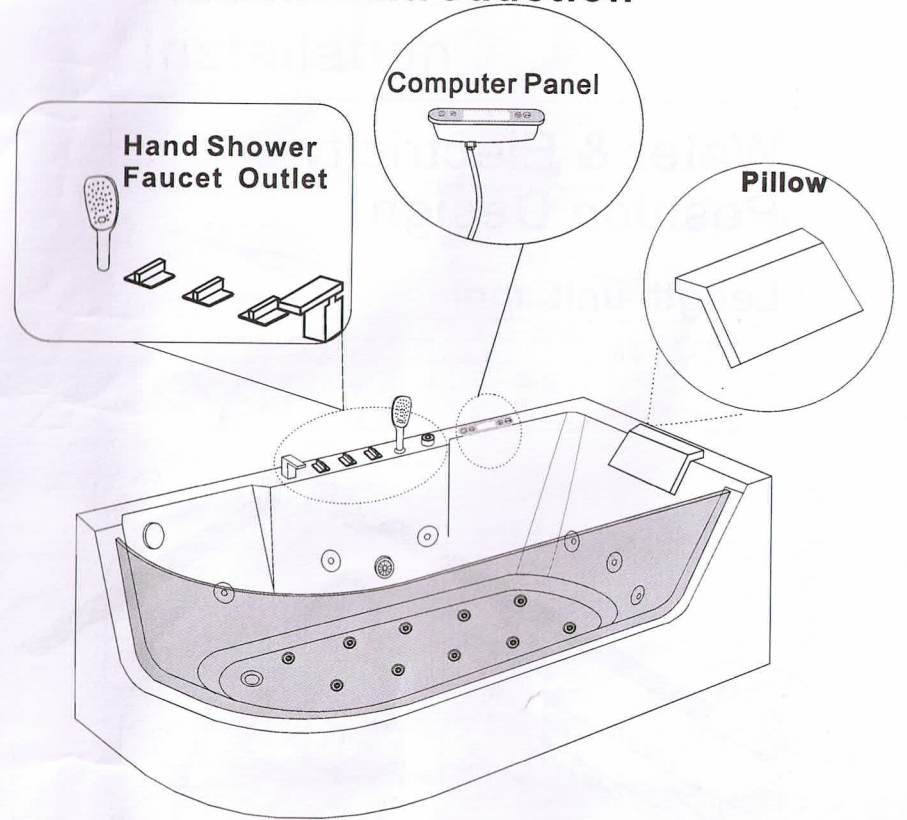### massage bathtub

C-403 L & R
1700x800x580 mm

Functional Introduction

Computer Panel

Hand Shower
Faucet Outlet
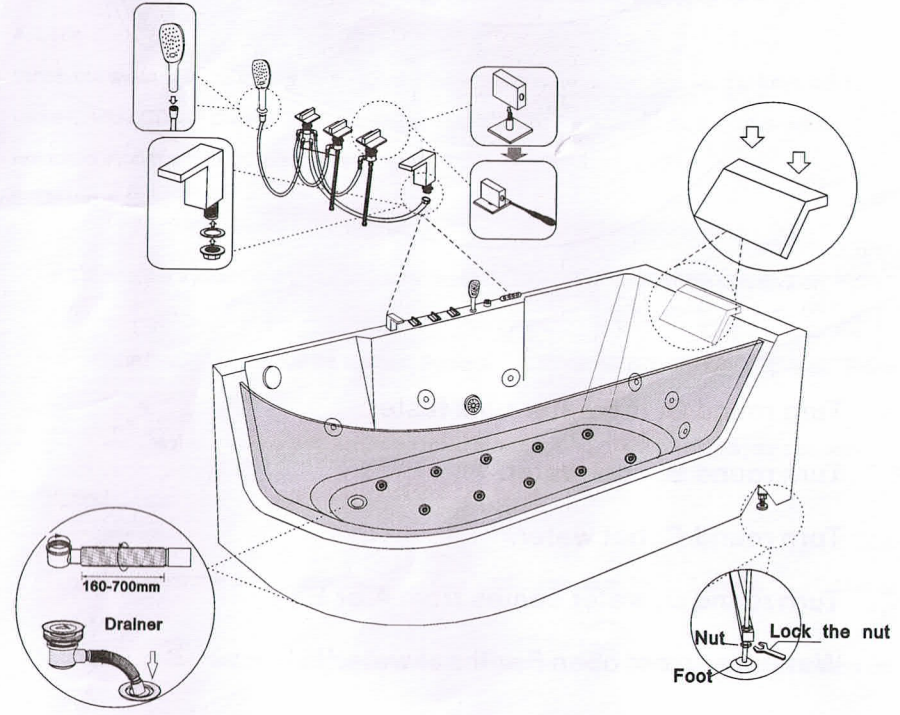
Pillow

Back Water

Lamp

Massage jet

Drain

Bubble Jet

Water & Electricity Position Design

Length unit: mm
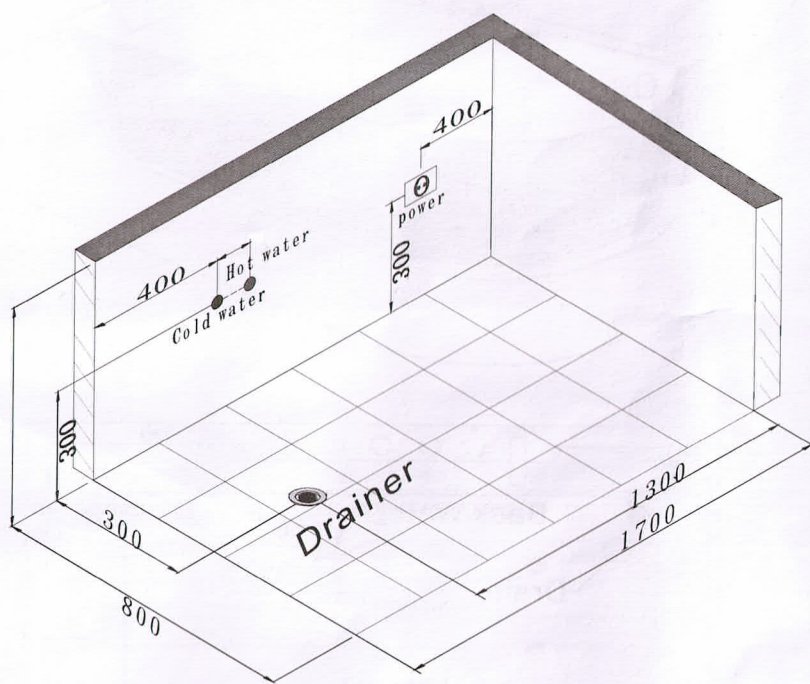
Accessories Installation

Slotted head screw driver

Omnipotent Spanner

Tape measure

Cross head screw driver

Gradient ruler

A1 1pcs

A2 1pcs

A3 1pcs

A4 1pcs

A5 3pcs

A6 1pcs

160-700mm

Drainer

Nut   Lock the nut

Foot
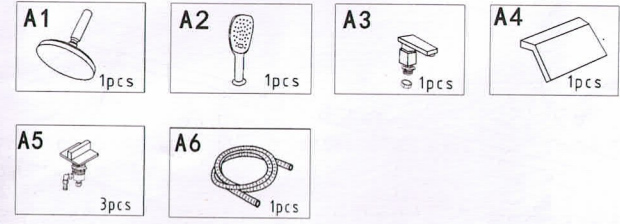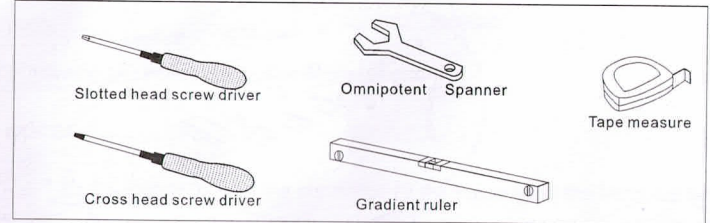
Functional Instructions

Spillway

G
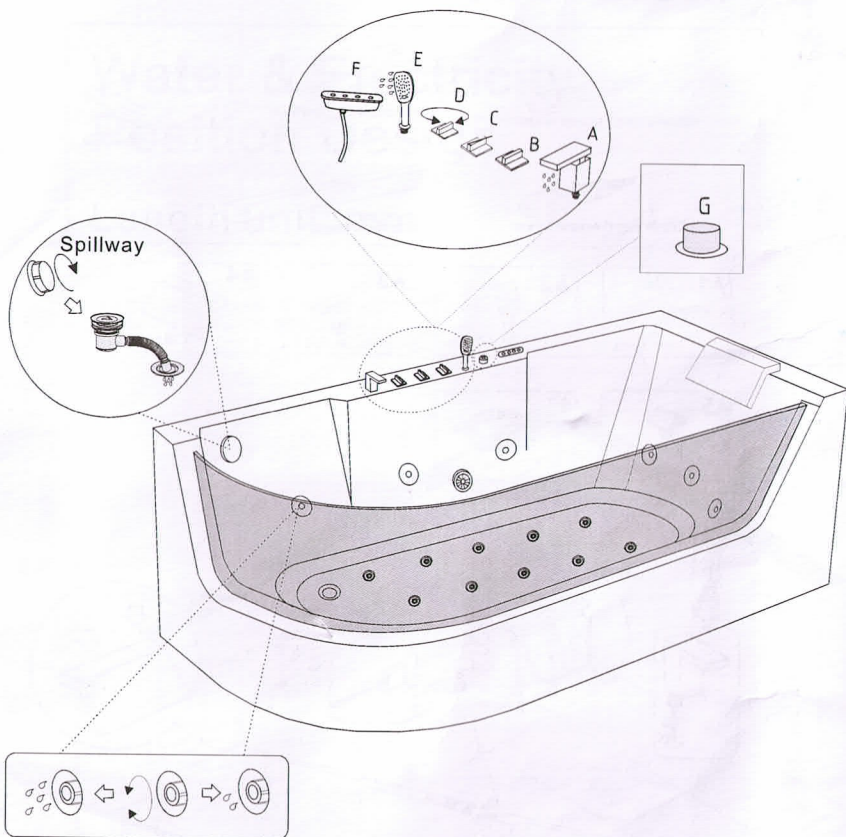
Turn round G, the water runs faster.

Turn round B, cool water.

Turn round C, hot water.

Turn round D, water comes from A or E.
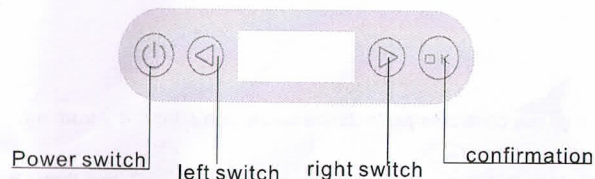
Warning: do not open F without water!!

Operation of Computer Panel F

Power switch   left switch   right switch   confirmation

1. The buzzer will ring Di...when any button is pressed.

2. " ⏻ " power

Press " ⏻ " for 2 seconds to start the controller. At the same time, the lamp will be turned on ; press the icon again for 2 seconds to stop the controller and all the loads will be turned off.

3 Lamp

When the system is on, press " ◁ 、 ▷ ", till the cursor is on " ☀ ". Press " OK ", lamp will turn on. Press " OK "again, lamp changes color. Press" OK ", the lamp will turn off.

4. Lock

When the system is on, if there is no touch to the panel within 3 minutes, all the keys will be locked. And LCD will display "LOCK"; then press any key for 3 seconds, the keys will be unlocked. And the "LOCK" disappear from the LCD.

5. Ozone

5.1 When the system is on, continuously press " ◁ 、 ▷ ", when the cursor is on" O_3 ". Press" OK ",ozone will be started. Symbol " O_3 "will be dynamically displayed; Press " OK "again, ozone will be turned off and symbol" O_3 "will be displayed statically.

6. Blower

When the system is on, press " ◁ 、 ▷ ", till cursor is on" ⊙ ". Press " OK ", blower will be on. " ⊙ "will be displayed dynamically; press " OK "again, the blower will be off. " ⊙ "will be displayed statically.

7. Water pump surf

7.1 The water checking device of this controller protects the water pump from dry burning.

7.2 When the system is on, press" ◁ " " ▷ "till the cursor moved to " ⬡ ", and then press " OK "to start the pump，if the water level sensor detects the water level have reached the set value then the pump will start to work. The pump icon will be displayed dynamically. Press " OK " again to turn the pump off；

7.3 When the water level sensor sensed that the water level is lower than the set value, the pump can not be started.

7.4 When the water surf pump function is on, and the system checks the water level lower than the setting value, water surf pump function stops automatically, at the same time the pump icon blinks. Whenever the system checks the water level reachingthe set value, the icon stops blink and the pump will resume to work.